

Product Updates


윙트라 펌웨어 V 2.8.3 업데이트 방법 안내

펌웨어 V 2.8.3 은 다음과 같은 기능이 개선되었습니다.


▶ 더욱 효율적이고 안전한 RTH

RTH 진행 중에도 사진 촬영이 지속되어
데이터 처리 결과가 개선되었습니다.


기존 V2.8.2 이하 버전을 사용하시는 분들은
다음 페이지 부터 안내하는 방법대로
최신 버전 업데이트를 진행해 주세요.

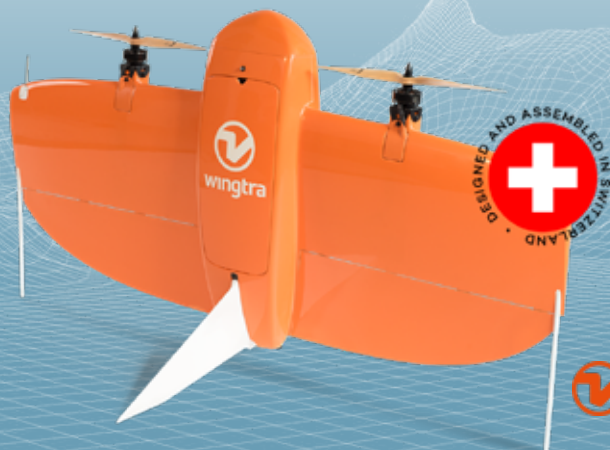

Product Updates

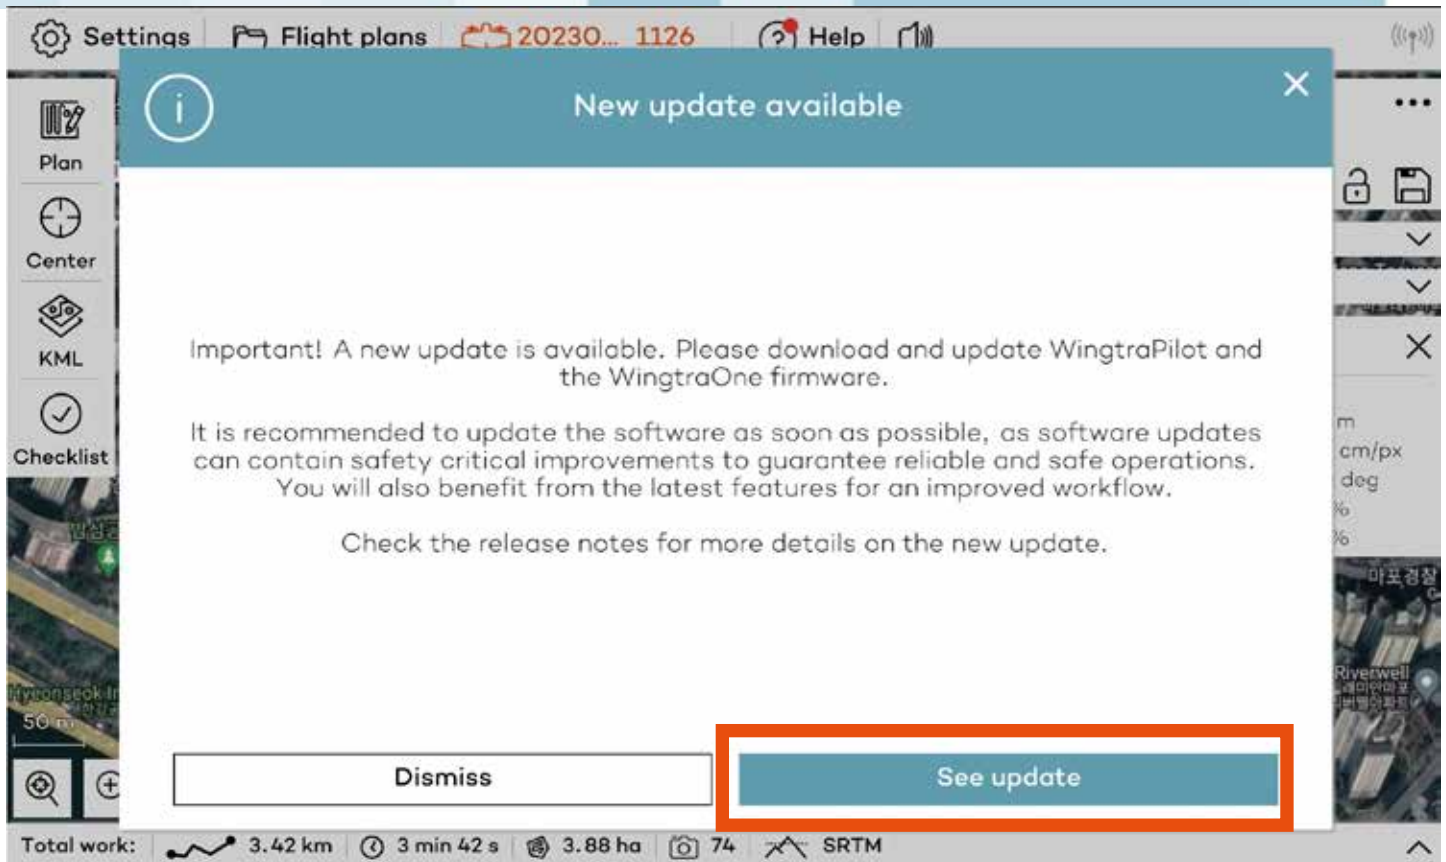

1. See update 버튼을 클릭하세요.

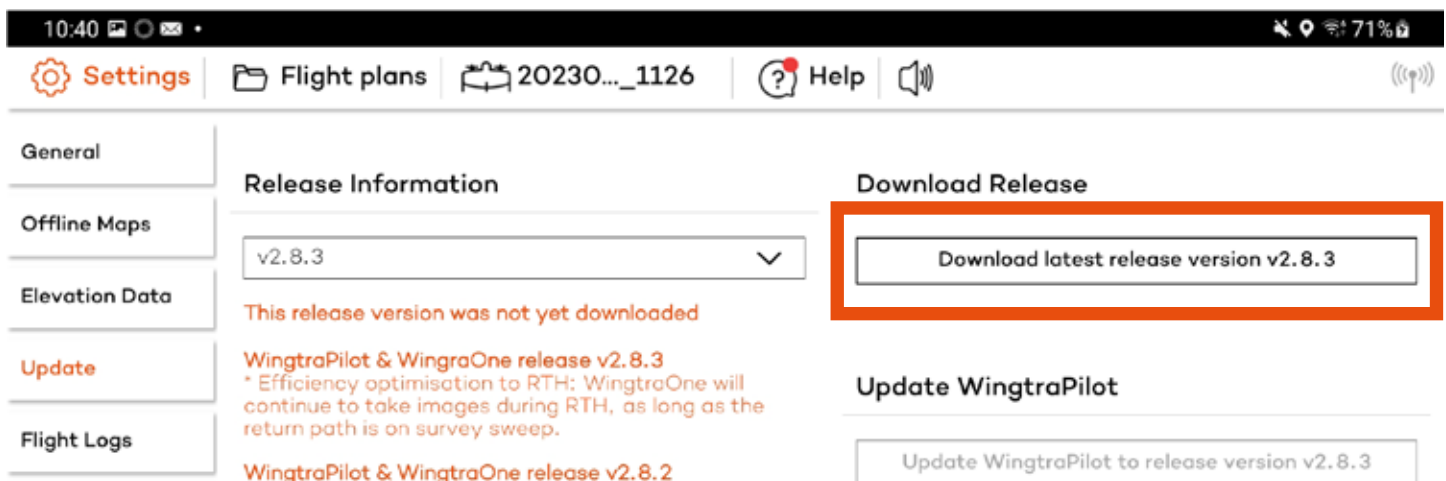

2. Download latest release version v2.8.3 을 클릭하여 파일을 다운로드 받아주세요.

Product Updates

Settings | Flight plans | 20230..._1126 | Help |

General | Offline Maps | Elevation Data | **Update** | Flight Logs | System Overview

Release Information

v2.8.3

This release version was not yet downloaded

WingtraPilot & WingtraOne release v2.8.3
* Efficiency optimisation to RTH: WingtraOne will continue to take images during RTH, as long as the return path is on survey sweep.

WingtraPilot & WingtraOne release v2.8.2

CRITICAL UPDATE!
To perform this update please make sure the **telemetry is disconnected during release download and WingtraPilot update**, and tablet date settings are set to the correct date.

Download Release

Download latest release version v2.8.3

Update WingtraPilot

Update WingtraPilot to release version v2.8.3

Update WingtraOne

3. Update WingtraPilot 을 클릭하여
앱을 다운로드 받아주세요.

Update | Flight Logs | System Overview

WingtraPilot & WingtraOne release v2.8.3
* Efficiency optimisation to RTH: WingtraOne will continue to take images during RTH, as long as the return path is on survey sweep.

WingtraPilot & WingtraOne release v2.8.2

CRITICAL UPDATE!
To perform this update please make sure the **telemetry is disconnected during release download and WingtraPilot update**, and tablet date settings are set to the correct date.

* This fixes a critical bug that caused WingtraPilot to crash, whenever telemetry is connected. The bug is related to tablet system time and occurs only since March 2nd 2023 11:00 CET.

Update WingtraPilot

Update WingtraPilot to release version v2.8.3

Update WingtraOne

Select WingtraOne SD card to copy release version v2.8.3

To start updating your WingtraOne, get the WingtraOne SD card and insert it into the tablet.


4. Update WingtraOne 을 클릭하여
드론 신규 펌웨어를 설치해 주세요.

※ 단, 업데이트 시 드론 전원을 반드시 끈 상태에서
진행해 주셔야 합니다.

Product Updates




5. WingtraOne의 SD 카드를 분리해 주세요.

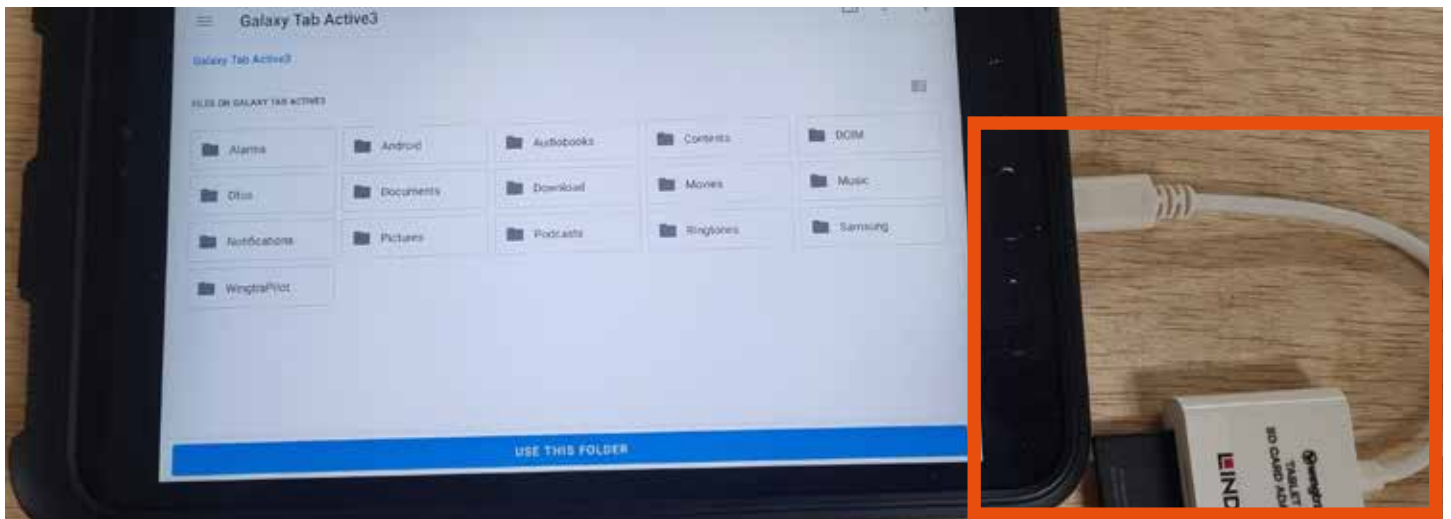

6. 제공된 젠더를 이용하여 분리한 SD 카드를
타블렛에 연결해 주세요.

Product Updates

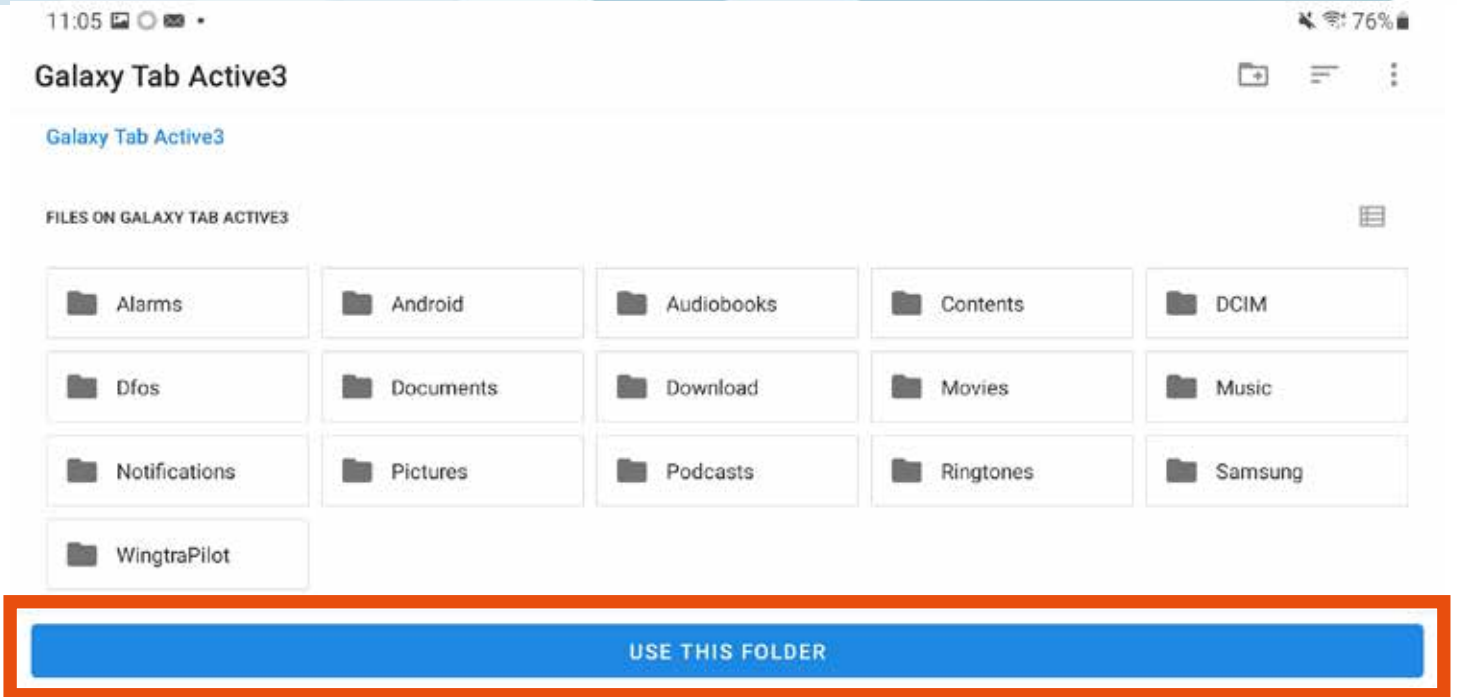

7. 태블릿 USB Drive 및 Root 폴더 선택 후
USE THIS FOLDER를 클릭해 주세요.



8. WingtraOne의 배터리를 연결하고
SD 카드를 다시 삽입해 주세요.

Product Updates

Firmware Update

Your WingtraOne detected new firmware.
Please be aware that you will lose telemetry connection for a short time during the update process.

Update now

9. 배터리 연결 후 WingtraPilot 앱에서
Update now를 클릭해 주세요. (앱 시작 후 30초 후 시도)

